


LOW VOLTAGE ZEROTOX BELL COPPER CABLES

1kV Zerotox 4 Core Copper Armoured



Cable Description:

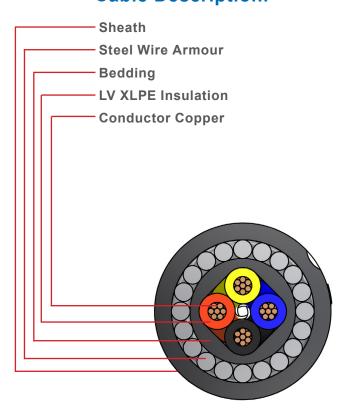

General Data:

Properties:

Copper 4 Core

Specification SANS 1507

Voltage Rating 600 / 1000V

PVC Insulated

Typical

Applications:

Underground Reticulation and

underground supply

Use Only In applications protected

from solar radiation

Options:

Standard PVC

ZEROTOX SWA

(white stripe)



Technical Infromation and Photographs from CBI electric



LOW VOLTAGE ZEROTOX BELL COPPER CABLES

1kV Zerotox 4 Core Copper Armoured



Product Information:

Cable Size	Approximate Diameter	Current Rating		Volt Drop (Three Phase)	Approximate Cable Mass		
(mm²)	(mm)	(A)		(mV/A/m)	(kg)		
		Ground	Ducts	Air		Cable	Gross (500m)
1.5	14.5	25	20	21	25.08	0.45	225
2.5	15.5	33	27	27	15.36	0.53	265
4	16.5	43	36	37	9.56	0.63	315
6	18.0	55	44	48	6.38	0.75	375
10	20.0	74	60	66	3.80	1.00	500
16	22.5	94	76	88	2.39	1.30	650



Technical Infromation and Photographs from CBI electric

Address: 4 Branch Road, Germiston 1401, P.O. Box 678, Germiston 1400



Complete your Project:

Please select the items you require and we will be in touch

Cables and Wires: Lighting:

Indoor
Outdoor
General
Other
Other

Let an ACTOM Let an ACTOM

Specialist Contact you Specialist Contact you

Transformers (Distribution):

Indoor Indoor
Outdoor Outdoor
General General
Other Other

Accessories:

Let an ACTOM Let an ACTOM

Specialist Contact you Specialist Contact you

Specific Information:



For more Information on this Product Please Send us the Folowing

Product Information:	
Product Name:	
Quantity:	
Project Name:	
Date the Product is required:	
Your Contact Information:	
Name and Surname:	
Company:	
Email:	
Phone Number:	

Province:

Thank You

For having a Look at this Product

Please send this PDF back to us with all your Information



Scan the QR Code to visit our Website: