

COMPACT FLUORESCENT LAMPS

OSRAM Dulux S and Dulux D



Dulux S
(CFLni)



Dulux D
(CFLni, 2 Tubes)

Product Features:

Lamp: Short and compact pin-base lamp with single-turn (Dulux S) and double-turn tubes (Dulux D)

Colour Rendering: (Ra : 80...89)

Base: Dulux S = Single-ended two-pin plug-in G23 base
Dulux D = Single-ended four-pin plug-in G24d base

General Data:

Product Benefits:

Cost Effective Extremely economical

Quality of Light Good

Life Long service Life

Specifications Improved maintenance

Extremely low profile (Dulux S)
Excellent uminous flux (Dulux D)

Typical

Applications:

Lighting *Offices, public buildings
*Supermarkets, department stores and shops
*Hotels, restaurants
*Industry

Colour Type:

	Sky White	Cool Daylight	Daylight	Cool White	White	Warm White	INTERNA	Special Light Colours		
Code:	880	865	965	954	840	940	835	830	830	827
	8 000 K	6 500 K	5 400K	5 400K	4 000K	4 000K	3 500K	3 000K	3 000K	2 700K



Technical Information and Photographs from OSRAM
Selected Information has been Edited by ACTOM Electrical Products

Address: 4 Branch Road, Germiston 1401, P.O. Box 678, Germiston 1400


Email: aep.enquiries@actom.co.za

Tel: +27 11 878 3050


Website: www.actomep.co.za

COMPACT FLUORESCENT LAMPS

OSRAM Dulux S and Dulux D

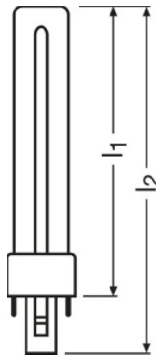

DULUX S 7 W/840,
DULUX S 9 W/840,
DULUX S 11 W/840

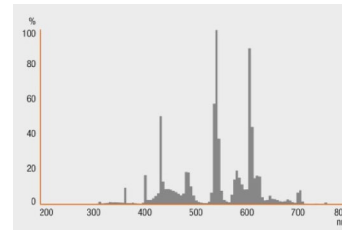

DULUX S 7 W/840,
DULUX S 9 W/840,
DULUX S 11 W/840

Product Information on Dulux S:

Product Description	W	Length (mm)	Diameter (mm)	Lumen (lm)	CCT (K)	CRI (Ra)	Rated Ave Life (h)	EEC
DULUX S 7 W/840	7	135	-	402	4000	≥ 80	10 000	B
DULUX S 9 W/840	9	165	-	600	4000	≥ 80	10 000	A
DULUX S 11 W/840	11	235	-	900	4000	≥ 80	10 000	A




Technical Information and Photographs from OSRAM
Selected Information has been Edited by ACTOM Electrical Products


Address: 4 Branch Road, Germiston 1401, P.O. Box 678, Germiston 1400

COMPACT FLUORESCENT LAMPS

OSRAM Dulux S and Dulux D

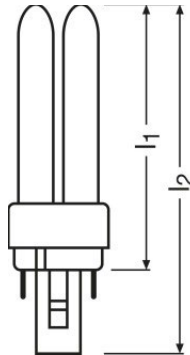

DULUX D 13 W/830,
DULUX D 18 W/840,
DULUX D 26 W/840

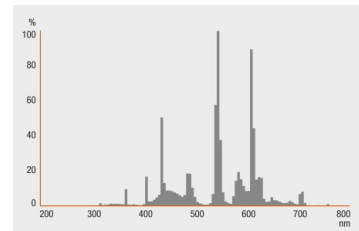

DULUX D 18 W/840,
DULUX D 26 W/840

Product Information on Dulux D:

Product Description	W	Length	Diameter	Lumen	CCT	CRI	Rated Ave Life	EEC
		(mm)	(mm)	(lm)	(K)	(Ra)	(h)	
DULUX D 13 W/830	13	136	11	900	3000	80...89	10 000	A
DULUX D 18 W/840	18	151	11	1200	4000	80...89	10 000	B
DULUX D 26 W/840	26	170	11	1800	4000	80...89	10 000	A



Technical Information and Photographs from OSRAM
Selected Information has been Edited by ACTOM Electrical Products

Address: 4 Branch Road, Germiston 1401, P.O. Box 678, Germiston 1400

Email: aep.enquiries@actom.co.za

Tel: +27 11 878 3050

Website: www.actomep.co.za

Complete your Project:

Please select the items you require and we will be in touch

Cables and Wires:

Indoor
Outdoor
General
Other
Let an ACTOM
Specialist Contact you

Lighting:

Indoor
Outdoor
General
Other
Let an ACTOM
Specialist Contact you

Transformers (Distribution):

Indoor
Outdoor
General
Other
Let an ACTOM
Specialist Contact you

Accessories:

Indoor
Outdoor
General
Other
Let an ACTOM
Specialist Contact you

Specific Information:

Address: 4 Branch Road, Germiston 1401, P.O. Box 678, Germiston 1400

For more Information on this Product Please Send us the Following

Product Information:

Product Name:

Quantity:

Project Name:

Date the Product is required:

Your Contact Information:

Name and Surname:

Company:

Email:

Phone Number:

Province:

Thank You

For having a Look at this Product

Please send this PDF back to us with all your Information

Scan the QR Code to visit our Website:

