



## LED Ecomax B38 Candle DIM


### Features

- Dimmable from 10-100% brightness
- Wide light diffusion angle up to 300°
- Energy efficient

### Benefits

- Tune light intensity to suit your environment or the time of day
- Light where you need it
- Up to 80% energy savings compared to incandescent bulb, 35% compared to CFL

### Application




### Specification

Order Name	Power (W)	Power Factor	Lumen (lm)	Efficacy (lm/W)	Beam Angle	CRI	CCT (K)	Average Lifetime(hrs)	Energy Level
B38E14 4WW Dim E	4	0.7	250	63	200°	80	2700	15000	A+
B38E14 6WW Dim E	6	0.7	420	70	200°	80	2700	15000	A+

Application Conditions	
IP	20
Operating Temperature	-20-45°C
Application Temperature	25°C
Storage Environment	-25-50°C

Mechanical and Finishing Properties	
Optical Material	PC
Housing Material	PBT + Aluminum
Finishing Colour	White


Electrical supply	
Frequency (Hz)	50/60Hz
Voltage (V)	220V-240V
AC/DC	AC



### Packaging Information

Order Name	Single Box(1pc/box)		Packaging Unit		
	Dimensions(mm) (HxWxL)	Gross Weight (kg)	Dimensions(mm) (HxWxL)	Gross Weight (kg)	Packing QTY (pcs/CTN)
B38E14 4WW Dim E	126*42*42	0.0514	225*133*92	1.542	30
B38E14 6WW Dim E	126*42*42	0.0514	225*133*92	1.542	30

### Dimensional Drawing

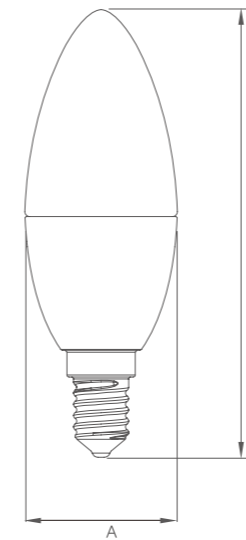

B38	
A (mm)	Ø38
B (mm)	112