



LED Performer Tunable White Bulb


Features

- Change CCTs from 6000K to 3000K and 4000K by switch on/off
- Long lifespan, install and forget
- Energy efficient

Benefits

- Easy control by switch and no need any app or remote control.
- Lasts 20 times longer than incandescent bulb, up to 20 years lifetime
- Up to 85% energy savings compared to incandescent bulb, 40% compared to CFL

Application




Specification

Order Name	Power (W)	Power Factor	Lumen (lm)	Efficacy (lm/W)	Input current (mA)	CRI	CCT (K)	Average Lifetime(hrs)	Energy Level
LED P A60 E27 7W Tunable White	7	0.5	650	93	51	80	3000K/4000K/6000K	25000	A+
LED P A60 B22 7W Tunable White	7	0.5	650	93	51	80	3000K/4000K/6000K	25000	A+
LED P A60 E27 9W Tunable White	9	0.5	806	90	65	80	3000K/4000K/6000K	25000	A+
LED P A60 B22 9W Tunable White	9	0.5	806	90	65	80	3000K/4000K/6000K	25000	A+

Application Conditions	
IP	20
Operating Temperature	-20-45°C
Application Temperature	25°C
Storage Environment	-25-50°C

Mechanical and Finishing Properties	
Optical Material	PC
Housing Material	PBT + Aluminum
Finishing Colour	White


Electrical supply	
Frequency (Hz)	50/60Hz
Voltage (V)	220V-240V
AC/DC	AC



Packaging Information

Order Name	Single Box(1pc/box)		Packaging Unit		
	Dimensions(mm) (HxWxL)	Gross Weight (kg)	Dimensions(mm) (HxWxL)	Gross Weight (kg)	Packing QTY (pcs/CTN)
LED P A60 E27 7W TW	122*62*62	0.093	640*265*140	3.72	40
LED P A60 B22 7W TW	122*62*62	0.093	640*265*140	3.72	40
LED P A60 E27 9W TW	122*62*62	0.093	640*265*140	3.72	40
LED P A60 B22 9W TW	122*62*62	0.093	640*265*140	3.72	40

Dimensional Drawing

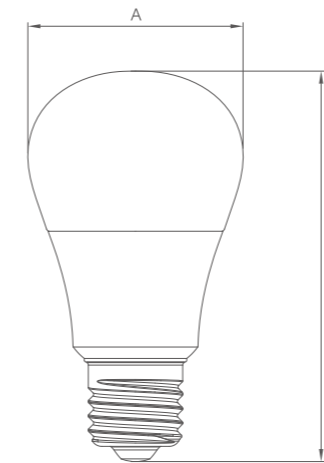

	A60 E27	A60 B22
A (mm)	Φ60	Φ60
B (mm)	109	107