

LOW VOLTAGE PVC BELL CABLES **1kV PVC Copper 2 Core Armoured ECC**



General Data:

Properties:

Copper	2 Core
Specification	SANS 1507
Voltage Rating	600 / 1000V
PVC Insulated	
ECC	Earth Continuity Conductor

Typical

Applications:

Underground Reticulation and underground power supply

Options:

Standard PVC


Red Stripe Blue Stripe



Technical Information and Photographs from CBI electric

Address: 4 Branch Road, Germiston 1401, P.O. Box 678, Germiston 1400

Cable Description:

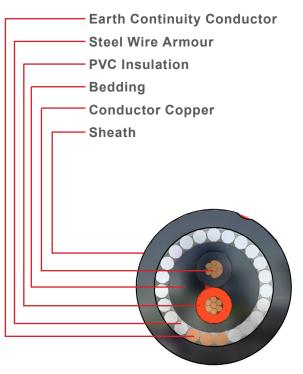



LOW VOLTAGE PVC BELL CABLES 1kV PVC Copper 2 Core Armoured ECC





Product Information:

Cable Size	Approximate Diameter	Current Rating		Volt Drop (Three Phase)	Approximate Cable Mass	
(mm²)	(mm)	(A)		(mV/A/m)	(kg)	
		Ground	Air		Cable	Gross (500m)
1.5	14.0	23	20	28.96	0.40	200
2.5	15.0	31	26	17.73	0.45	225
4	16.5	40	36	11.03	0.57	285
6	17.5	51	45	7.37	0.70	350
10	19.5	68	62	4.38	0.83	415
16	21.5	88	82	2.76	1.03	515



Technical Information and Photographs from CBI electric

Address: 4 Branch Road, Germiston 1401, P.O. Box 678, Germiston 1400



Complete your Project:

Please select the items you require and we will be in touch

Cables and Wires:

Indoor Outdoor General Other Let an ACTOM Specialist Contact you

Lighting:

Indoor Outdoor General Other Let an ACTOM Specialist Contact you

Transformers (Distribution):

Indoor Outdoor General Other Let an ACTOM Specialist Contact you

Accessories:

Indoor Outdoor General Other Let an ACTOM Specialist Contact you

Specific Information:

Address: 4 Branch Road, Germiston 1401, P.O. Box 678, Germiston 1400



For more Information on this Product Please Send us the Folowing

Product Information:

Product Name:

Quantity:

Project Name:

Date the Product is required:

Your Contact Information:

Name and Surname:

Company:

Email:

Phone Number:

Province:

Thank You

For having a Look at this Product

Please send this PDF back to us with all your Information



Scan the QR Code to visit our Website:

Address: 4 Branch Road, Germiston 1401, P.O. Box 678, Germiston 1400

Tel: +27 11 878 3050